

# 外壁用ステンレス製換気口〈セルフド®〉

## SFX-S 〈同芯ガラリ型 一般用〉



### 材質



SUS304

### 仕上

シルバー焼付塗装

### 金網付型式

SFX-SN 10M  
SFX-SN 5M  
SFX-SN 3M



### Dimensions

※指定色は日塗工の番号でご指定下さい。


Model	A	B	C	D	E	F	標準価格	金網加算	指定色加算
SFX50S	48	121	96	68	50	14	¥3,200	¥500	¥1,300
SFX65S	62	121	96	68	50	14	¥3,200	¥500	¥1,300
SFX75S	72	121	96	68	50	14	¥3,200	¥500	¥1,300
SFX100S	97	154	130	90	50	20	¥3,400	¥600	¥1,700
SFX125S	122	175	150	100	50	20	¥4,600	¥700	¥1,900
SFX150S	147	204	180	115	55	20	¥5,600	¥1,200	¥2,300
SFX175S	170	240	210	130	60	20	¥7,300	¥1,700	¥2,600
SFX200S	197	270	240	145	75	20	¥8,500	¥2,100	¥2,900

### 2 管路製品

Model	A	B	C	D	E	F	標準価格	金網加算	指定色加算
SFXK125S-VP	122	175	150	100	50	20	¥5,000	¥700	¥1,900
SFXK125S-VM	128	175	150	100	50	20	¥5,000	¥700	¥1,900

### 圧力損失特性

サイズ	圧力損失係数		流量係数		有効開口	
	排気	開口率	開口率	面積 (cm <sup>2</sup> )	面積 (cm <sup>2</sup> )	面積 (cm <sup>2</sup> )
75	3.75	51.6%	51.6%	22.8	22.8	22.8
100	2.56	62.5%	62.5%	49	49	49
125	2.54	62.7%	62.7%	76.9	76.9	76.9
150	2.6	62.0%	62.0%	109.6	109.6	109.6
175	3.27	55.3%	55.3%	133	133	133
200	2.26	66.5%	66.5%	209.1	209.1	209.1

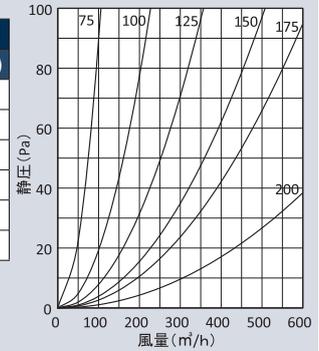

## SFX-S 大口徑 〈同芯ガラリ型 一般用〉



### 材質



SUS304

### 仕上

シルバー焼付塗装

### 金網付型式

SFX-SN 10M  
SFX-SN 5M  
SFX-SN 3M




### Dimensions

※指定色は日塗工の番号でご指定下さい。

Model	A	B	C	D	E	F	標準価格	金網加算	指定色加算
SFX225S	220	297	267	160	75	20	¥24,000	¥2,500	¥4,500
SFX250S	245	330	300	175	75	20	¥25,000	¥3,000	¥5,100
SFX300S	295	360	330	190	75	20	¥28,500	¥4,000	¥6,800

### 圧力損失特性

サイズ	圧力損失係数		流量係数		有効開口	
	排気	開口率	開口率	面積 (cm <sup>2</sup> )	面積 (cm <sup>2</sup> )	面積 (cm <sup>2</sup> )
225	2.95	58.2%	58.2%	231.5	231.5	231.5
250	3.3	55.0%	55.0%	270.2	270.2	270.2
300	5.09	44.3%	44.3%	313.3	313.3	313.3

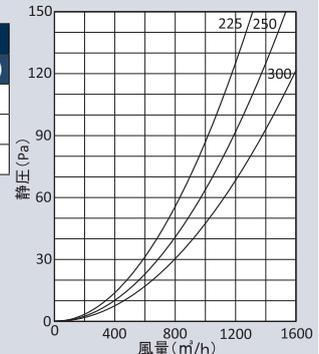

## SFXD-S (同芯ガラリ型 防火ダンパー付)



### 材質

フェイス: SUS304  
FD: 鋼板 1.6t

### 仕上



シルバー焼付塗装

### 温度フェーズ

標準 72°C  
オプション 120°C・180°C

### 金網付型式

SFXD-SN 10M  
SFXD-SN 5M  
SFXD-SN 3M




### Dimensions

※指定色は日塗工の番号でご指定下さい。

Model	A	B	C	D	E	F	標準価格	金網加算	指定色加算
SFXD100S	97	154	130	90	45	20	¥7,000	¥600	¥1,700
SFXD125S	122	175	150	100	50	20	¥10,000	¥700	¥1,900
SFXD150S	146	204	180	115	45	20	¥10,200	¥1,200	¥2,300
SFXD200S	197	270	240	145	60	20	¥14,700	¥2,100	¥2,900

### 圧力損失特性

サイズ	圧力損失係数		流量係数		有効開口	
	排気	開口率	開口率	面積 (cm <sup>2</sup> )	面積 (cm <sup>2</sup> )	面積 (cm <sup>2</sup> )
100	2.56	62.5%	62.5%	49	49	49
125	2.84	59.3%	59.3%	72.7	72.7	72.7
150	2.71	60.7%	60.7%	107.3	107.3	107.3
200	2.4	64.5%	64.5%	202.9	202.9	202.9

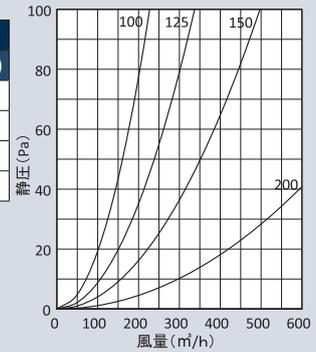

## SFXD-SC (同芯ガラリ型 防火ダンパー付)



### 材質

フェイス: SUS304  
FD: SUS304 1.5t

### 仕上

シルバー焼付塗装



### ガラリ着脱式

### 温度フェーズ

標準 72°C  
オプション 120°C・180°C

### 金網付型式

SFXD-SCN 10M  
SFXD-SCN 5M  
SFXD-SCN 3M



### Dimensions

※指定色は日塗工の番号でご指定下さい。

Model	A	B	C	D	E	F	標準価格	金網加算	指定色加算
SFXD75SC	72	121	96	68	50	14	¥7,100	¥500	¥1,300
SFXD100SC	97	154	130	90	65	20	¥7,700	¥600	¥1,700
SFXD125SC	122	175	150	100	81	20	¥9,600	¥700	¥1,900
SFXD150SC	147	204	180	115	95	20	¥11,000	¥1,200	¥2,300
SFXD175SC	172	240	210	130	105	20	¥15,000	¥1,700	¥2,600
SFXD200SC	197	270	240	145	115	20	¥16,000	¥2,100	¥2,900

### 圧力損失特性

サイズ	圧力損失係数		流量係数		有効開口	
	排気	開口率	開口率	面積 (cm <sup>2</sup> )	面積 (cm <sup>2</sup> )	面積 (cm <sup>2</sup> )
100	2.96	58.1%	58.1%	45.6	45.6	45.6
125	3.19	56.0%	56.0%	68.7	68.7	68.7
150	3.09	56.9%	56.9%	100.5	100.5	100.5
175	3.49	53.5%	53.5%	128.7	128.7	128.7
200	2.65	61.4%	61.4%	193.1	193.1	193.1

