

## CFX-MS

(ガラリ型 下部着脱タイプ ワイド水切り付)





**材質**  
SUS304

**仕上**  
シルバー焼付塗装

**ガラリ着脱式**

**金網付型式**

CFX-MSN 10M  
CFX-MSN 5M  
CFX-MSN 3M




### Dimensions

※指定色は日塗工の番号でご指定下さい。

Model	A	B	C	D	E	F	G	H	標準価格	金網加算	指定色加算
CFX50MS	48	187	148	97	50	11	30	168	¥5,800	¥700	¥1,800
CFX65MS	62	187	148	97	50	11	20	168	¥5,800	¥700	¥1,800
CFX75MS	72	187	148	97	50	11	20	168	¥5,800	¥700	¥1,800
CFX100MS	97	187	148	97	50	11	20	168	¥5,900	¥700	¥1,800
CFX125MS	122	243	200	135	50	12	20	220	¥7,600	¥1,200	¥2,600
CFX150MS	147	243	200	135	55	12	20	220	¥7,800	¥1,200	¥2,600
CFX175MS	170	295	241	176	60	12	23	265	¥19,000	¥2,100	¥3,300
CFX200MS	197	295	241	176	75	12	23	265	¥19,600	¥2,100	¥3,300

### 圧力損失特性

サイズ	圧力損失係数		有効開口面積 (cm <sup>2</sup> )
	排気	開口率	
100	5.03	44.6%	35
125	2.57	62.4%	76.5
150	4.13	49.2%	86.9
175	2.84	59.3%	142.7
200	5.03	44.6%	140

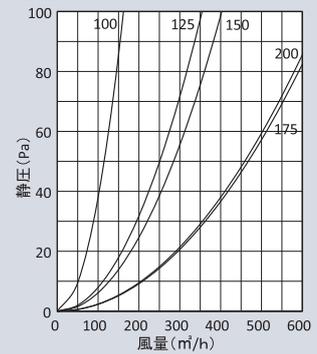

## CFX-MS 大口徑

(ガラリ型 下部開閉タイプ ワイド水切り付)





**材質**  
SUS304

**仕上**  
シルバー焼付塗装

**ガラリ開閉式**

**金網付型式**

CFX-MSN 10M  
CFX-MSN 5M  
CFX-MSN 3M




### Dimensions

※指定色は日塗工の番号でご指定下さい。

Model	A	B	C	D	E	F	G	H	標準価格	金網加算	指定色加算
CFX225MS	220	415	320	235	75	15	28	345	¥41,000	¥3,000	¥8,900
CFX250MS	245	415	320	235	75	15	28	345	¥42,000	¥3,000	¥8,900
CFX300MS	295	445	350	260	75	15	28	380	¥54,500	¥4,000	¥13,200

### 圧力損失特性

サイズ	圧力損失係数		有効開口面積 (cm <sup>2</sup> )
	排気	開口率	
225	3.57	52.9%	210.3
250	5.58	42.3%	207.7
300	5.61	42.2%	298.3

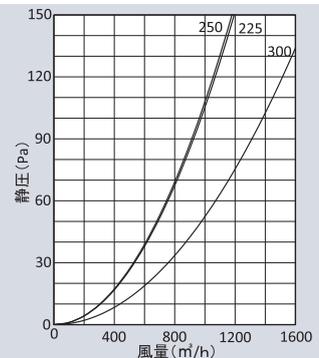

# 外壁用ステンレス製換気口〈深型フード〉

## CFXD-MSC

〈ガラリ型 下部着脱タイプ ワイド水切り付 防火ダンパー付〉



**材質** フェイス：SUS304  
FD：SUS304 1.5t

**仕上** シルバー焼付塗装

**ガラリ着脱式**


**温度フェース** 標準72℃  
オプション120℃・180℃

**薄壁対応製品** 100φ 150φ 200φのみ

### Dimensions

※指定色は日塗工の番号でご指定下さい。

Model	A	B	C	D	E	F	G	H	標準価格	金網加算	指定色加算
CFXD75MSC	72	187	148	97	50	11	20	168	¥9,700	¥700	¥1,800
CFXD100MSC	97	187	148	97	65	11	20	168	¥9,800	¥700	¥1,800
CFXD125MSC	122	243	200	135	81	12	20	220	¥13,000	¥1,200	¥2,600
CFXD150MSC	147	243	200	135	95	12	20	220	¥13,300	¥1,200	¥2,600
CFXD175MSC	172	295	241	176	105	12	23	265	¥23,000	¥2,100	¥3,300
CFXD200MSC	197	295	241	176	115	12	23	265	¥23,400	¥2,100	¥3,300

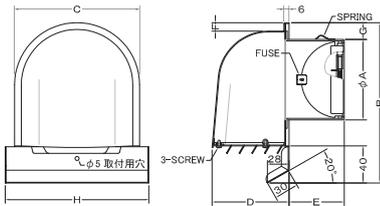


### 金網付型式

CFXD-MSCN 10M  
CFXD-MSCN 5M  
CFXD-MSCN 3M

### 圧力損失特性

サイズ	圧力損失係数	流量係数	有効開口
	排気	開口率	面積 (cm <sup>2</sup> )
100	5.71	41.8%	32.8
125	3.23	55.6%	68.2
150	4.89	45.2%	79.9
175	3.22	55.7%	134
200	5.34	43.3%	135.8



## CFXD-MSC 大口徑

〈ガラリ型 下部開閉タイプ ワイド水切り付 防火ダンパー付〉



**材質** フェイス：SUS304  
FD：SUS304 1.5t

**仕上** シルバー焼付塗装

**ガラリ開閉式**

**温度フェース** 標準72℃  
オプション120℃・180℃


### 金網付型式

CFXD-MSCN 10M  
CFXD-MSCN 5M  
CFXD-MSCN 3M

### Dimensions


※指定色は日塗工の番号でご指定下さい。

Model	A	B	C	D	E	F	G	H	標準価格	金網加算	指定色加算
CFXD250MSC	247	415	320	235	144	15	28	345	¥59,200	¥3,000	¥8,900

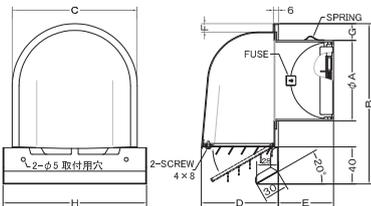

### 圧力損失特性

サイズ	圧力損失係数	流量係数	有効開口
	排気	開口率	面積 (cm <sup>2</sup> )
250	6.26	40.0%	196.1



## CFXD-MS

〈ガラリ型 下部着脱タイプ ワイド水切り付 防火ダンパー付〉



**材質** フェイス：SUS304  
FD：鋼板 1.6t

**仕上** シルバー焼付塗装

**ガラリ着脱式**

**温度フェース** 標準72℃  
オプション120℃・180℃


### 金網付型式

CFXD-MSN 10M  
CFXD-MSN 5M  
CFXD-MSN 3M

### Dimensions

※指定色は日塗工の番号でご指定下さい。

Model	A	B	C	D	E	F	G	H	標準価格	金網加算	指定色加算
CFXD100MS	97	187	148	97	45	11	20	168	¥10,300	¥700	¥1,800
CFXD125MS	122	243	200	135	50	12	20	220	¥14,300	¥1,200	¥2,600
CFXD150MS	146	243	200	135	45	12	20	220	¥14,400	¥1,200	¥2,600
CFXD200MS	197	295	241	176	60	12	23	265	¥27,000	¥2,100	¥3,300

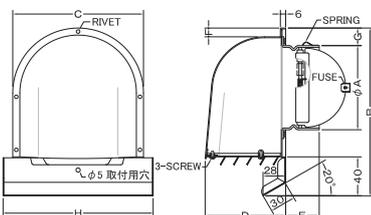

### 圧力損失特性

サイズ	圧力損失係数	流量係数	有効開口
	排気	開口率	面積 (cm <sup>2</sup> )
100	5.81	41.5%	32.6
125	2.86	59.1%	72.5
150	4.99	44.8%	79.1
200	5.43	42.9%	134.8

